

()

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

MODULAR-SYSTEM RJ45



Jack/Keystone

Category:
Plug type:
Screening:
Colour:
Part no:
Packing unit:
Dust Protection:

6 _A	6	6	6	5e
RJ45 8(8)				
yes		no		
metallic		black	white	
802377	802916	804691	805044	804645
12				
yes	no	yes	yes	no



Panel

Version:
Module type:
Colour:
Max. number of modules:
Part no:
Packing unit:
Dust Protection:


Modular Panel	
RJ45	
grey	black
Max. number of modules:	
802376	805429
Packing unit:	
optional see Accessories	



Outlet

Version:
Module type:
Colour:
Max. number of modules:
Part no:
Packing unit:
Dust Protection:

Support for module			
RJ45			
white			Metall
3	2	1	2
802986	802378	802985	804763
4			1
optional see Accessories			no

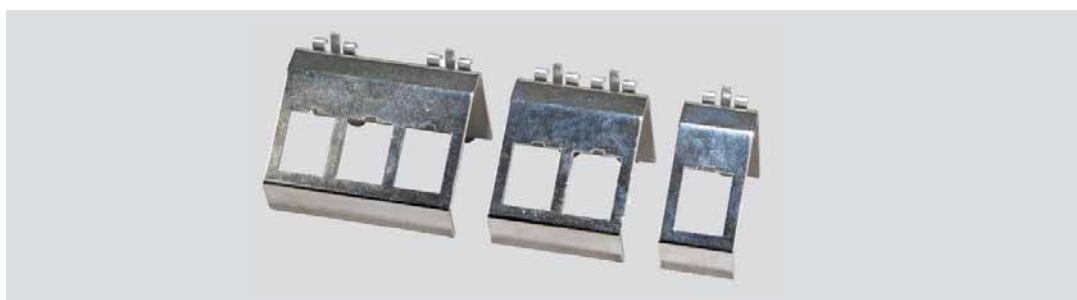

DIN rail module

Version:

DIN rail module for Jack/Keystone

Max. number of modules:

1	2	3
---	---	---

Colour:

metallic

Part no:

805403	805404	805405
---------------	---------------	---------------

Packing unit:

1



Accessories

Part no:

805381	802988	802987	802990	804286
---------------	---------------	---------------	---------------	---------------

Description:

Tools for AMP-Twist Jack	Floor tank frame set 3x3 Port empty	Floor tank frame set 2x3 Port empty	Dust Protection forKeystone-system Outlet and Panels	
--------------------------	----------------------------------------	----------------------------------------	------------------------------------------------------	--

Colour:

metallic	black		white	black
----------	-------	--	-------	-------

Norms and standards

Kat. 5, Kat. 5e, Kat. 6, Kat. 6_A, Kat. 7_A according to the specifications of each product. More informations can be found at our data sheets.

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Patch-Panels RJ45



Category 6E_A



Type

Configuration

Housing material:	Steel plate, solid
Colour:	Grey similar to RAL 7035
Board:	3x8 mother board, number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	Overall screen
Screen removal:	metalized cable straps
Strain relief:	by means of cable straps
Cover lock:	Quick-action snap cover

Patch panel category 24P 6EA 500MHz

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,6 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Width:	483 mm
Depth:	125 mm
Number of height modules (HM):	1
Fastening dimensions:	19"

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 500 MHz (10 GBit Ethernet) in accordance with category 6a EIA/TIA 568-B.2-10, IEEE 802.3an TM-2006, ISO/IEC 11801 (Amendment 1 JTC 1/SC N1255), ISO/IEC TR-24750 and EN 55022 (EMV).

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Part no.

802024

Dimensions and specifications may be changed without prior notice.

Packing unit

1



Type

Configuration

Housing material:	Steel plate, solid
Colour:	Grey similar to RAL 7035
Board:	3x8 mother board, colour and number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	Overall screen
Screen removal:	via continuous screening tape
Strain relief:	via pre-installed cable clips
Cover lock:	Quick-action snap cover

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,7 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Width:	483 mm
Depth:	148 mm
Number of height modules (HM):	1
Fastening dimensions:	19"

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 250 MHz in the permanent link of category 6 / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, EIA/TIA 568 B, and EN 55022 (EMC).

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Part no.

82848

Dimensions and specifications may be changed without prior notice.

Packing unit

1

Patch-Panels RJ45 unscreened



Category 6 / Class E



Type

Configuration

Housing material:	Steel plate, solid
Colour:	Black similar to RAL 9005
Board:	3x8 mother board, colour and number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	no
Strain relief:	by means of cable straps

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,7 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Width:	440 mm
Depth:	110 mm
Number of height modules (HM):	1
Fastening dimensions:	19"

Norms and standards

HELUKAT® CONNECTING SYSTEMS® unscreened system component up to 250 MHz of category 6 / Class E in accordance with ISO 11801, EN 50173.

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Part no.

802908

Dimensions and specifications may be changed without prior notice.

Packing unit

1

Patch-Panels RJ45



Kategorie 5e / Klasse D



Type

Configuration

Housing material:	Steel plate, solid
Colour:	Grey similar to RAL 7035
Board:	3x8 mother board, colour and number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	Overall screen
Screen removal:	via continuous screening tape
Strain relief:	via pre-installed cable clips
Cover lock:	Quick-action twist lock

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,7 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Width:	483 mm
Depth:	148 mm
Number of height modules (HM):	1
Fastening dimensions:	19"

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 100 MHz in category 5(e) / Class D in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, EIA/TIA 568 B, and EN 55022 (EMC)

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Part no.

82010

Dimensions and specifications may be changed without prior notice.

Packing unit

1



Type

**RJ-45 UP socket 2P cat. 6EA
500MHz vertical**

**RJ-45 UP socket 2P cat. 6a
500MHz horizontal**

Configuration

Housing material:
Colour:
Board:
Push-on connector type:
Outlet direction:
Number of bushes:
Type of screen:
Strain relief:
Cable inlet:

Die-cast, shielded
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
Overall screen
via pre-installed cable clips
vertical

Die-cast, shielded
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
Overall screen
via pre-installed cable clips
horizontal

Connecting system

Connection type:
Suitable for cable diameter:
Insulation diameter, min.:

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,6 mm (PE)

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,6 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Dimensions of central plate:
Installation dimensions:

50 x 50mm
50 x 50 x 32mm

50 x 50mm
50 x 50 x 32mm

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 500 MHz (10 GBit Ethernet) in accordance with category 6a EIA/TIA 568-B.2-10, IEEE 802.3an TM-2006, ISO/IEC 11801 (Amendment 1 JTC 1/SC N1255), ISO/IEC TR-24750 and EN 55022 (EMV).

Application

As workstation interface in applications of digital and analog image, data and voice transmission. Available as in-wall version (channel) and top-mount version (wall).

Part no.

802025

802034

Dimensions and specifications may be changed without prior notice.

Packing unit

10

10



Type

RJ-45 UP socket class E 2P horizontal

Configuration

Housing material:	Die-cast, shielded
Colour:	Pure White similar to RAL 9010
Board:	1x2
Push-on connector type:	RJ45(8/8)
Outlet direction:	45 degrees
Number of bushes:	2
Type of screen:	Overall screen
Strain relief:	via pre-installed cable clips
Cable inlet:	horizontal

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0,4 - 0,64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,6 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Dimensions of central plate:	50 x 50mm
Installation dimensions:	51 x 51 x 29mm

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 250 MHz in the permanent link of category 6 / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, EIA/TIA 568 B, and EN 55022 (EMC)

Application

As workstation interface in applications of digital and analog image, data and voice transmission. Available as in-wall version (channel) and top-mount version (wall).

Part no.

82847

Dimensions and specifications may be changed without prior notice.

Packing unit

10

Outlets RJ45 unscreened



Category 6/ Class E



Type

RJ-45 UP socket unscreened class E 2P vertical

RJ-45 UP socket unscreened class E 2P horizontal

Configuration

Housing material:
Colour:
Board:
Push-on connector type:
Outlet direction:
Number of bushes:
Type of screen:
Strain relief:
Cable inlet:

Plastic
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
no
via pre-installed cable clips
vertical

Plastic
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
no
via pre-installed cable clips
horizontal

Connecting system

Connection type:
Suitable for cable diameter:
Insulation diameter, min.:

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,6 mm (PE)

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,6 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Norms and standards

HELUKAT® system component unscreened up to 250 MHz of category 6 or Class E in accordance with ISO 11801, EN 50173, ANSI/TIA/EIA 568 B2-1.

Application

As workstation interface in applications of digital and analog image, data and voice transmission. Available as in-wall version (channel) and top-mount version (possible with an extra frame).

Part no.

802909

803033

Dimensions and specifications may be changed without prior notice.

Packing unit

10

10

Outlets RJ45



Category 5e / Class D



Type

RJ-45 UP socket cat. 5e 2P horizontal

RJ-45 UP socket cat. 5e 2P vertical

Configuration

Housing material:
Colour:
Board:
Push-on connector type:
Outlet direction:
Number of bushes:
Type of screen:
Strain relief:
Cable inlet:

Die-cast, shielded
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
Overall screen
via pre-installed cable clips
horizontal

Die-cast, shielded
Pure White similar to RAL 9010
1x2
RJ45(8/8)
45 degrees
2
Overall screen
via pre-installed cable clips
vertical

Connecting system

Connection type:
Suitable for cable diameter:
Insulation diameter, min.:

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,1 mm (PE)

LSA plus - insulation piercing connections
0,4 - 0,64mm (AWG 26 - 22)
0,7 - 1,1 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Dimensions of central plate:
Installation dimensions:

50 x 50mm
51 x 51 x 29mm

50 x 50mm
51 x 51 x 29mm

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 100 MHz in category 5(e) / Class D in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, EIA/TIA 568 B, and EN 55022 (EMC)

Application

As workstation interface in applications of digital and analog image, data and voice transmission. Available as in-wall version (channel) and top-mount version (wall).

Part no.

82008

82853

Dimensions and specifications may be changed without prior notice.

Packing unit

10

10

Patch Cables RJ45



Category 6E_A



Type

Cable

Designation:
Sheath material:
Frequency:

Patch cable S/FTP halogenfree, Cat.6a 500 MHz (10GBit)

S/FTP 4x2xAWG 26/7 LSZH
LSZH
up to 500 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 500 MHz (10GBit) of category 6a / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, and EIA/TIA 568 C-2.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
802380	grey	1,0	10
802381	grey	2,0	10
802382	grey	3,0	10
802383	grey	5,0	10
802384	grey	7,5	10
802385	grey	10,0	10
804287	grey	15,0	10

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths and colors on request.



Type

Cable

Designation:
Sheath material:
Frequency:

Patch cable U/UTP halogenfree, Cat.6a 500 MHz (10GBit)

U/UTP 4x2xAWG 24/7 LSZH
LSZH
up to 500 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 500 MHz (10GBit) of category 6a / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, and EIA/TIA 568 C-2.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
804972	grey	1,0	10
804973	grey	2,0	10
804974	grey	3,0	10
804975	grey	5,0	10
804976	grey	7,5	10
804977	grey	10,0	10
805055	grey	15,0	10

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths and colors on request.



Type

Cable

Designation:
Sheath material:
Frequency:

Patch cable S/FTP halogenfree, Cat.6

S/FTP 4x2xAWG 27/7 halogenfree
LSZH
up to 250 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 250 MHz of category 6 / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, and EIA/TIA 568 B.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
806253	grey	0,25	10
82857	grey	0,5	10
82858	grey	1,0	10
806254	grey	1,5	10
82859	grey	2,0	10
82860	grey	3,0	10
82861	grey	5,0	10
82862	grey	7,5	5
82863	grey	10,0	5
82864	grey	15,0	5

Part no.	Sheath colour	Length in metres	Unit
802999	blue	0,5	10
803000	blue	1,0	10
803001	blue	2,0	10
803002	blue	3,0	10
803003	blue	5,0	10
803004	blue	7,5	5
803005	blue	10,0	5
803006	blue	15,0	5

Part no.	Sheath colour	Length in metres	Unit
806255	green	0,25	10
803007	green	0,5	10
803008	green	1,0	10
806256	green	1,5	10
803009	green	2,0	10
803010	green	3,0	10
803011	green	5,0	10
803012	green	7,5	5
803013	green	10,0	5
803014	green	15,0	5

Continuation ►

Patch Cables RJ45



Category 6 / Class E

Part no.	Sheath colour	Length in metres	Unit
802991	red	0,5	10
802992	red	1,0	10
802993	red	2,0	10
802994	red	3,0	10
802995	red	5,0	10
802996	red	7,5	5
802997	red	10,0	5
802998	red	15,0	5

Part no.	Sheath colour	Length in metres	Unit
803015	yellow	0,5	10
803016	yellow	1,0	10
803017	yellow	2,0	10
803018	yellow	3,0	10
803019	yellow	5,0	10
803020	yellow	7,5	5
803021	yellow	10,0	5
803022	yellow	15,0	5

Part no.	Sheath colour	Length in metres	Unit
803023	black	0,5	10
803024	black	1,0	10
803025	black	2,0	10
803026	black	3,0	10
803027	black	5,0	10
803028	black	7,5	5
803029	black	10,0	5
803030	black	15,0	5

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths, colors and crossover cables on request.

Patch Cables RJ45 unscreened



Category 6/ Class E



Type

Cable

Designation:
Sheath material:
Frequency:

U/UTP 4x2xAWG 24/7 PVC
PVC
up to 250 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 250 MHz in the of category 6 or EIA/TIA 568 B.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
803097	grey	0,5	10
803098	grey	1,0	10
803099	grey	2,0	10
803100	grey	3,0	10
803101	grey	5,0	10
803102	grey	7,5	10
803103	grey	10,0	10
803104	grey	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803113	blue	0,5	10
803114	blue	1,0	10
803115	blue	2,0	10
803116	blue	3,0	10
803117	blue	5,0	10
803118	blue	7,5	10
803119	blue	10,0	10
803120	blue	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803121	green	0,5	10
803122	green	1,0	10
803123	green	2,0	10
803124	green	3,0	10
803125	green	5,0	10
803126	green	7,5	10
803127	green	10,0	10
803128	green	15,0	10

Continuation ►

Patch Cables RJ45 unshielded



Category 6/ Class E

Part no.	Sheath colour	Length in metres	Unit
803105	red	0,5	10
803106	red	1,0	10
803107	red	2,0	10
803108	red	3,0	10
803109	red	5,0	10
803110	red	7,5	10
803111	red	10,0	10
803112	red	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803129	yellow	0,5	10
803130	yellow	1,0	10
803131	yellow	2,0	10
803132	yellow	3,0	10
803133	yellow	5,0	10
803134	yellow	7,5	10
803135	yellow	10,0	10
803136	yellow	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803137	black	0,5	10
803138	black	1,0	10
803139	black	2,0	10
803140	black	3,0	10
803141	black	5,0	10
803142	black	7,5	10
803143	black	10,0	10
803144	black	15,0	10

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths, colors and crossover cables on request.



Type

Cable

Designation:
Sheath material:
Frequency:

Patch cable SF/UTP PVC Cat.5e

SF/UTP 4x2xAWG 26/7 PVC
PVC
up to 100 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 100 MHz of category 5(e) / Class D in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, and EIA/TIA 568 B.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
803049	grey	0,5	10
803050	grey	1,0	10
803051	grey	2,0	10
803052	grey	3,0	10
803053	grey	5,0	10
803054	grey	7,5	10
803055	grey	10,0	10
803056	grey	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803065	blue	0,5	10
803066	blue	1,0	10
803067	blue	2,0	10
803068	blue	3,0	10
803069	blue	5,0	10
803070	blue	7,5	10
803071	blue	10,0	10
803072	blue	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803073	green	0,5	10
803074	green	1,0	10
803075	green	2,0	10
803076	green	3,0	10
803077	green	5,0	10
803078	green	7,5	10
803079	green	10,0	10
803080	green	15,0	10

Continuation ►

Patch Cables RJ45



Category 5e / Class D

Part no.	Sheath colour	Length in metres	Unit
803057	red	0,5	10
803058	red	1,0	10
803059	red	2,0	10
803060	red	3,0	10
803061	red	5,0	10
803062	red	7,5	10
803063	red	10,0	10
803064	red	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803081	yellow	0,5	10
803082	yellow	1,0	10
803083	yellow	2,0	10
803084	yellow	3,0	10
803085	yellow	5,0	10
803086	yellow	7,5	10
803087	yellow	10,0	10
803088	yellow	15,0	10

Part no.	Sheath colour	Length in metres	Unit
803089	black	0,5	10
803090	black	1,0	10
803091	black	2,0	10
803092	black	3,0	10
803093	black	5,0	10
803094	black	7,5	10
803095	black	10,0	10
803096	black	15,0	10

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths, colors and crossover cables on request.

Patch Cables RJ45



Category 5e / Class D



Type

Cable

Designation:
Sheath material:
Frequency:

Patch cable U/UTP PVC Cat.5e

U/UTP 4x2xAWG 24/7 PVC
PVC
up to 155 MHz

Plug

Push-on connector type 1:
Push-on connector type 2:
Pin assignment:

RJ45 8(8)
RJ45 8(8)
1:1 acc. to TIA/EIA 568 B

Flame proof

acc. to IEC 60332-1-2

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system components up to 155 MHz of category 5e in accordance with ISO 11801, EIA/TIA 568 B.

Preferred types

Part no.	Sheath colour	Length in metres	Unit
804646	grey	0,5	10
804647	grey	1,0	10
804648	grey	3,0	10
805737	grey	2,0	10
805738	grey	5,0	10
805739	grey	7,5	10
805740	grey	10,0	10
805741	grey	15,0	10

Dimensions and specifications may be changed without prior notice.

Options

Naturally, we also offer other lengths, colors and crossover cables on request.



Preferred types

Part no.	Description	Colour	Unit
801686	RJ45 plug 8 pole Category 5, TM11 grey	grey	10
801772	RJ45 plug 8 pole Category 6, TM21 black	black	10
82852	RJ-45 AP-frame	Pure White similar to RAL 9010	5
82695	RJ-45 AP-frame cat.5 socket	Pearl White similar to RAL 1013	5
800260	Central plate 80x80 UP-socket	Pure White similar to RAL 9010	10

Dimensions and specifications may be changed without prior notice.

Rubber Cable Reels

HELUKAT® Datacables



Type

Drum

Equipment:

Plug

Push-On connector type 1:

Push-On connector type 2:

System type:

Pin assignment:

Norms and standards

Preferred types

Characteristics

Options

Rubber cable reel with HELUKAT® copper data cable

Rubber

with supporting frame

RJ45 8/8 - jack

RJ45 8/8 - jack

office connector

1:1 acc. to TIA/EIA 568 B

Components of HELUKAT® CONNECTING SYSTEMS® to 155 MHz acc. Categorie 5E and to 600MHz acc. Categorie 6 (Link), ISO 11801 1st Edition, EN 50173-3 and EIA/TIA 568 B. Be in accordance with the Cat.5E respectively the Cat. 6 structured cabling.

Part no.	Designation	Sheath colour	Fre- quency MHz	Cable length m	Flame proof	Oil- resistant
802073	FTP 4x2xAWG24/1 PVC	Yellow similar to RAL 1021	155	50,0	-	-
802074	FTP 4x2xAWG24/1 PVC	Yellow similar to RAL 1021	155	90,0	-	-
802075	S-STP 4x2xAWG 23/1 FRNC	Blue Lilac similar to RAL 4005	600	50,0	acc. to IEC 60332-3	-
802076	S-STP 4x2xAWG 23/1 FRNC	Blue Lilac similar to RAL 4005	600	90,0	acc. to IEC 60332-3	-
802207	S-STP 4x2xAWG 23/1 PUR	Green similar to RAL 6018	600	50,0	acc. to IEC 60332-1-2	EN60811-2-1
802208	S-STP 4x2xAWG 23/1 PUR	Green similar to RAL 6018	600	90,0	acc. to IEC 60332-1-2	EN60811-2-1

Dimensions and specifications may be changed without prior notice.

Rubber cable reel with RJ45 jacks and dust protection. Suitable for mobile use on site, for example for meetings, TV-Transmissions, Fairs, etc.. Everywhere when there is a need for a removable cable connection. Usable for fixed installation cabling.

We also can deliver other cable length, cross-over cables or other types of plugs.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	